


**WIRE ADDRESS**

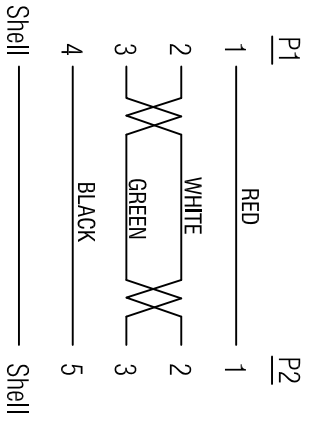

- Electrical Test:
1. 100% TEST OPEN SHORT MIS-WIRE.
  2. CONTACT RESISTANCE:3Ω MAX.
  3. INSULATION RESISTANCE:5MΩ MIN.
  4. HI-POT:300V DC/10MS.
  5. SUPPORT USB 2.0 480Mbps.

D	45P PVC BLACK		6
C	USB Micro B5P MALE(Black Insulator, Shell Nickel Plated)	1	PCS
B	USB A MALE(White Insulator, Shell Nickel Plated)	1	PCS
A	UL2725,28AWG*1P+28AWG*2C +ADB,OD:3.5mm,BLACK COLOR PVC JACKET.	1	PCS
PRODUCT SPECIFICATIONS			
NUMBER	1	2	4
		Quantity	Unit

ROLINE Micro USB BM to USB AM Black L=0.15m

Item 11.02.8310

Draw *Mika* Date: 2020.05.13

Approval

Duty F16 BOM.NO:13898

Sample NO.

