



10000+100/-0mm

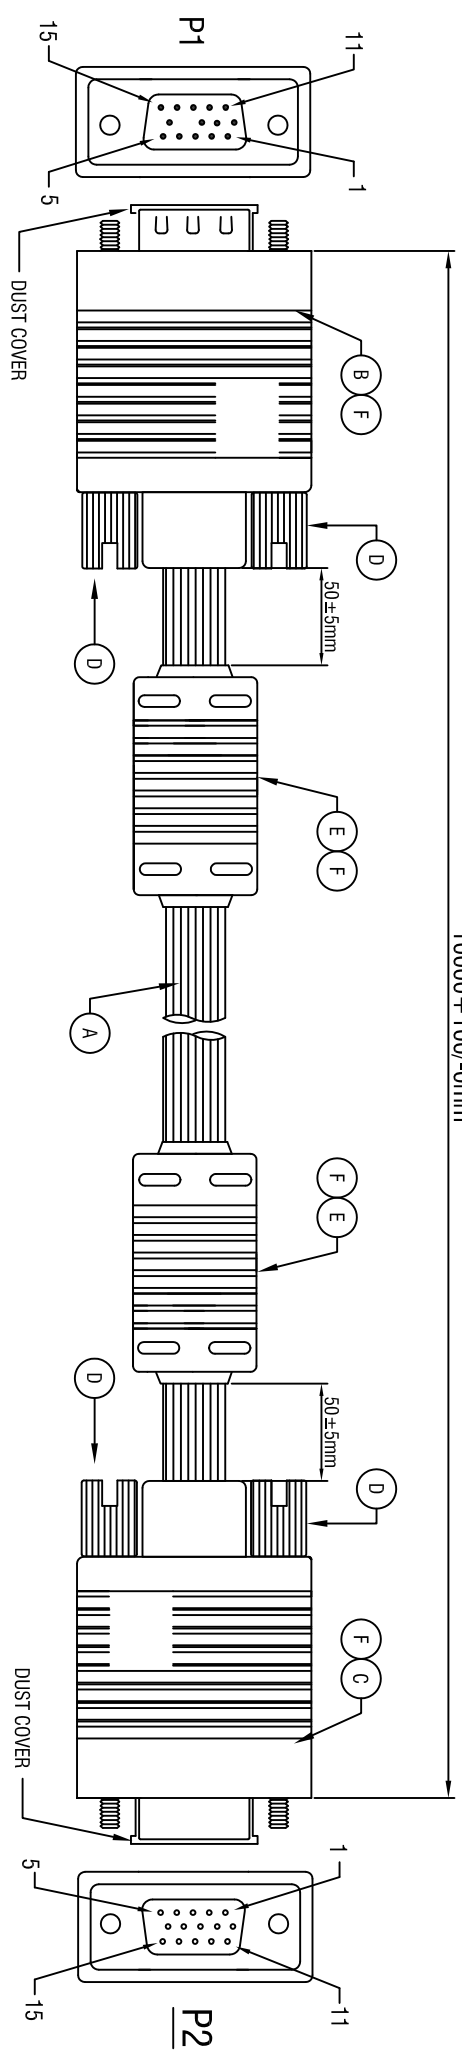

WIRE ADDRESS

- Electrical Test:
- 1.100% TEST OPEN SHORT MIS-WIRE.
 - 2.CONTACT RESISTANCE:10Ω MAX.
 - 3.INSULATION RESISTANCE:5MΩ MIN.
 - 4.HI-POT:300V DC/10MS.
 - 5.Real Test Passed 1280*1024.
 - 6.Real Test Not Twinkling,Double Vision and Decolor.

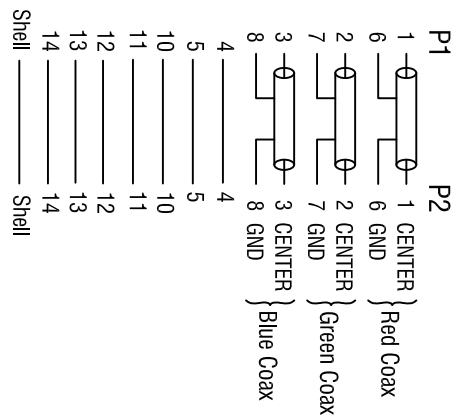

E		F		G	
F		4SP BLACK PVC		G	
E		Ferrite Core (17.5*28.5*9.5mm)		PCS 2	
D		HD37.7 Screw		PCS 4	
C		HDB15P FEMALE (PIN9 OUT, Black Insulator Nickel Plated)		PCS 1	
B		HDB15P MALE (PIN9 OUT, Black Insulator Nickel Plated)		PCS 1	
A		UL2919,28# 300AX+28#*7C+ADB, OD=8.0mm BLACK DENTATE PVC JACKET.		PCS 1	
F		PRODUCT SPECIFICATIONS		Quantity Unit	
1		2		4	
Sample NO.		F16		BOM.NO:	
Drawings of 1 (1)		Proportion: 1:1		Unit(mm)	
A4		Date: 2020.05.13		Item 11.04.5360	
Approval		*Make		ROLINE HQ VGA Cable with Ferrite, HD15 M - HD15 F, 10m	
Duty		F16		Draw 11.04.5360	
BOM.NO:		Date: 2020.05.13		Item 11.04.5360	
Sample NO.		F16		Draw *Make	
Drawings of 1 (1)		Proportion: 1:1		Unit(mm)	
A4		Date: 2020.05.13		Item 11.04.5360	

