



Datenblatt - Fiche technique - Data sheet

**11.99.8976**



VALUE USB 3.0 Kabel, Typ A-A, 3,0m

VALUE Câble USB 3.0 Type A-A, 3.0m

VALUE USB 3.0 Cable, A - A, M/M, 3.0 m





# ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

USB 3.0 A/M 9PIN  
INS:BLUE(PT 300C)

L±T

USB 3.0 A/M 9PIN  
INS:BLUE(PT 300C)

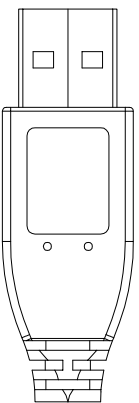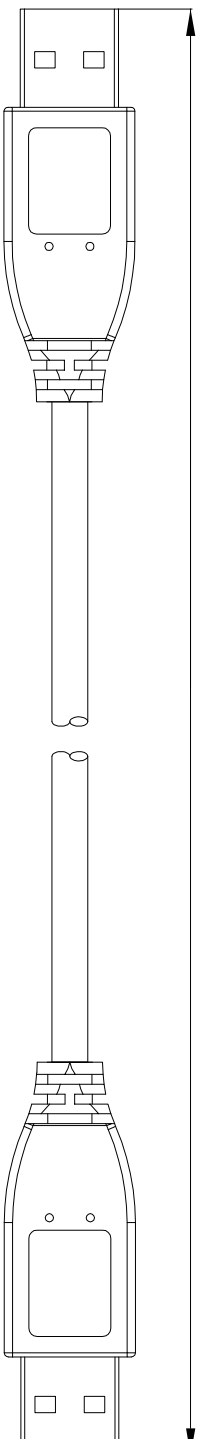

TUSB-0189

TUSB-0189

PIN OUT

P1		P2
1	RED	1 VCC
2	WHITE	2 -DATA
3	GREEN	3 +DATA
4	BLACK	4 GND_PWR+
5	BLUE	8 SDP1-
6	YELLOW	9 SDP1+
7	D.W	7 SDP1_Drain
8	PURPLE	5 SDP2_-
9	ORANGE	6 SDP2+
	SHELL	SHELL

## NOTE:

- 1.CABLE: UL-2725 [#28(7/0.127 T.C)×1P INS:Foam-PE+D.W(7/0.127 T.C)+AL/MY +Hot-melt-Mylar]×2C+#28(7/0.127 T.C)×1P INS:Polyolefin +#28(7/0.127 T.C)×2C INS:Polyolefin + AL/MY + B.D(85%) PVC JACKET; OD:5.2±0.15mm COLOR:WHITE(NK-W21) REV 3.0.
- 2.CONNECTOR:  
P1 & P2: USB 3.0 A/M 9PIN CONTACT:30U",SHELL:NI-PLATED.
- 3.HOOD:MOLDED TYPE,PVC 45P, COLOR:WHITE(NK-W21).
- 4.ELECTRICAL TEST:  
(1)100% OPEN SHORT & MIS WIRE TEST.  
(2)CONTACT RESISTANCE 3 ohm Max.  
(3)INSULATION RESISTANCE 10M ohm Min.  
(4)HI-POT DC300V
- 5.PACKING: EACH PC / POLYBAG + BAR CODE LABEL.

DWG	P/N	L(mm)	T(mm)	PCS/CARTON	BAR CODE NO.
170-3620-2	11.99.8976	3000	30	50	761199098834.1
170-3620-1	11.99.8975	1800	30	50	761199098833.4

Tolerance	Inch	M/M
X	.015	.30
XX	.010	.10
XXX	.005	.05

Draw		FANNIE 06/26/09'	
Title		Customer P/N:	
USB 3.0 A/M - A/M CABLE			

Check

App'd

Customer : T-RAG

Engr

Scale: NONE Units: M/M Third Angle Projection

Dwg No. 170-3620 REV:A Sheet:1/1

**Rotronic co., LTD.**