



REVISION			
REV	DESCRIPTION	DATE	SIGNATURE
A.1	Initial release	2018/07/17	Peter Li

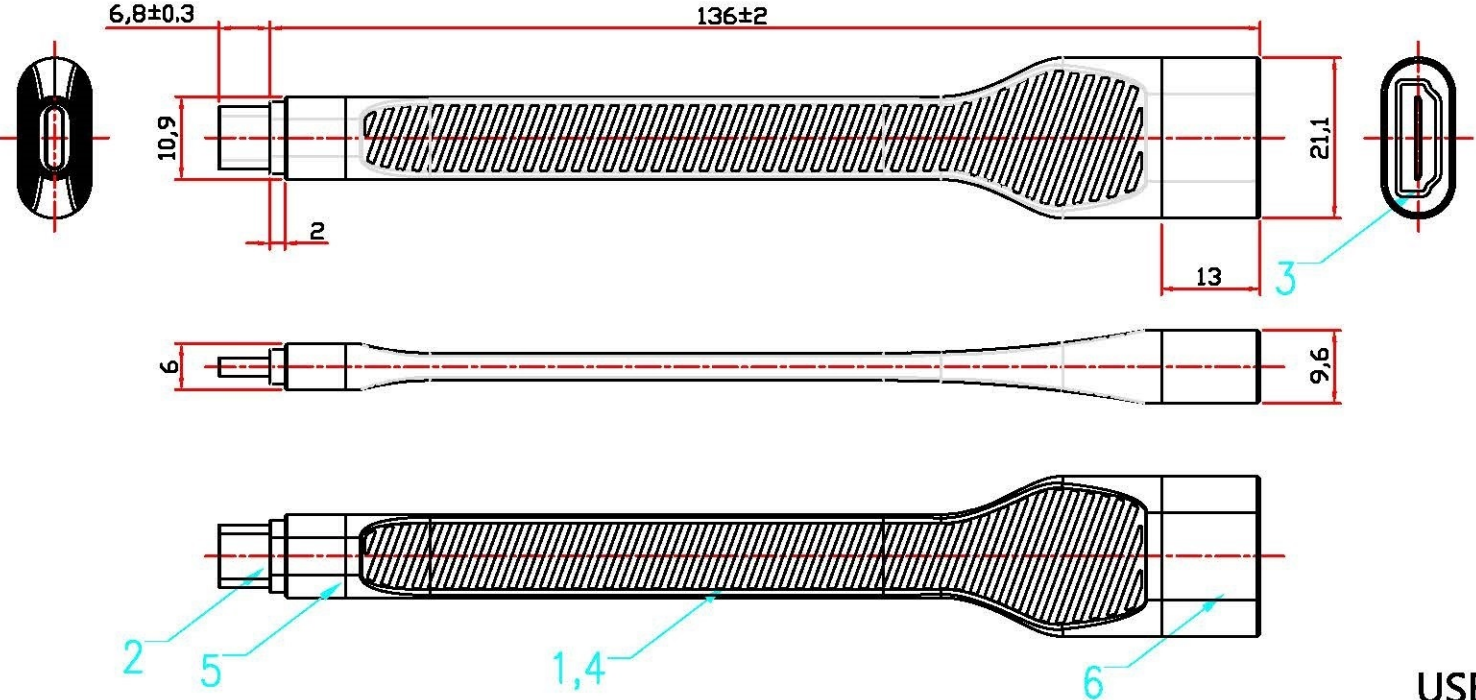

Wiring method

P2	P1
GND	A1, B1,A12,B12
VBUS	A4, B4,A9,B9
A5	A5
B5	B5
A6	A6
A7	A7
A2	B11
A3	B10
B11	A2
B10	A3
B2	A11
B3	A10
A11	B2
A10	B3
A8	B8
B8	A8
SHELL	SHELL

HDMI A

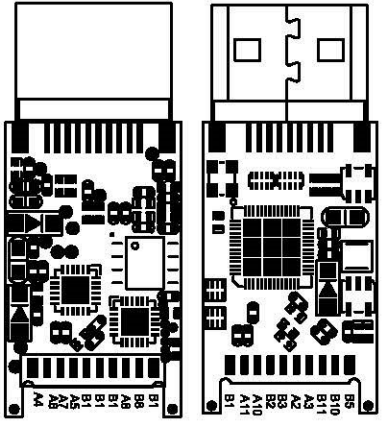

USB C



USB C to HDMI Adapter

1. Resolution: up to 4K@60HZ
2. FPC used to make adapter more flexible
3. IC solution: Cypress CCG2 and Parade PS176
4. USB-C device must support video out via USB-C

Item	Part Number	Material	Description	Quantity
⑥		Al Case 2	L15*W12.1*T6.2mm Silver	1
⑤		Al Case 1	L13*W21.1*T9.6 Silver	1
④		Molding	68A, TPE, Black	1
③		Connector 2	PCB A with HDMI Female	1
②		Connector 1	USB C Ni-Plated	1
①		Cable	FPC	1

Item no.: 12.03.3212  
 ROLINE Cableadapter USB3.1 C- HDMI, M/F, 0.13m, black



UNIT	SCALE	TOL UNLESS NOTED	APPROVED BY	CHECKED BY	DRAWN BY
mm	1:1	DIA ±0.1 EXTENT ±0.1 ANGLE ±1°			Peter Li
					2018/07/17