

# KA9140



- Serial KVM Adapter Module ( CPU Module )
- ➔ The Altusen serial CPU adapters connect KVM cables to the serial ports of the servers. Those adapters are light and in small form factor, fit perfectly into most of the rack-mount or desktop servers.



## Features


- Auto Signal Compensation (ASC), no DIP switch setting needed for the different distances.
- Hot pluggable - add or remove computers without having to power down the switch.
- Support VT-100.
- Lifetime firmware upgrades.
- Superior video quality - supports resolution of up to 1024 x 768; DDC2B.
- Built in ASIC for greater reliability and compatibility.
- CPU module designed with automatic conversion to allow for flexible interface combinations (PS/2, USB) to control all computer types (Serial).

## Specification

Connectors	Computer Side	RS-232	1 x DB-9 Female
	Console Side	Link	1 x RJ-45 Female
		Keyboard	1 x Min Din Female
		VGA	1 x HDB-15 Female
		Upgrade	1 x Earphone-jack-4 Female

LEDs	Power	1 (Orange)
	Link	1 (Green)
Switch (Normal / Upgrade)		1 x 2 way slide switch
Power Consumption		DC 5V 1.5W
Environment	Operating Temperature	0° ~ 50°C
	Storage Temperature	-20° ~ 60°C
	Humidity	0~80% RH, NC
Physical Properties	Housing	Metal
	Weight	0.50 kg
	Dimensions ( L x W x H )	20.00x8.15x2.50cm

## Diagram

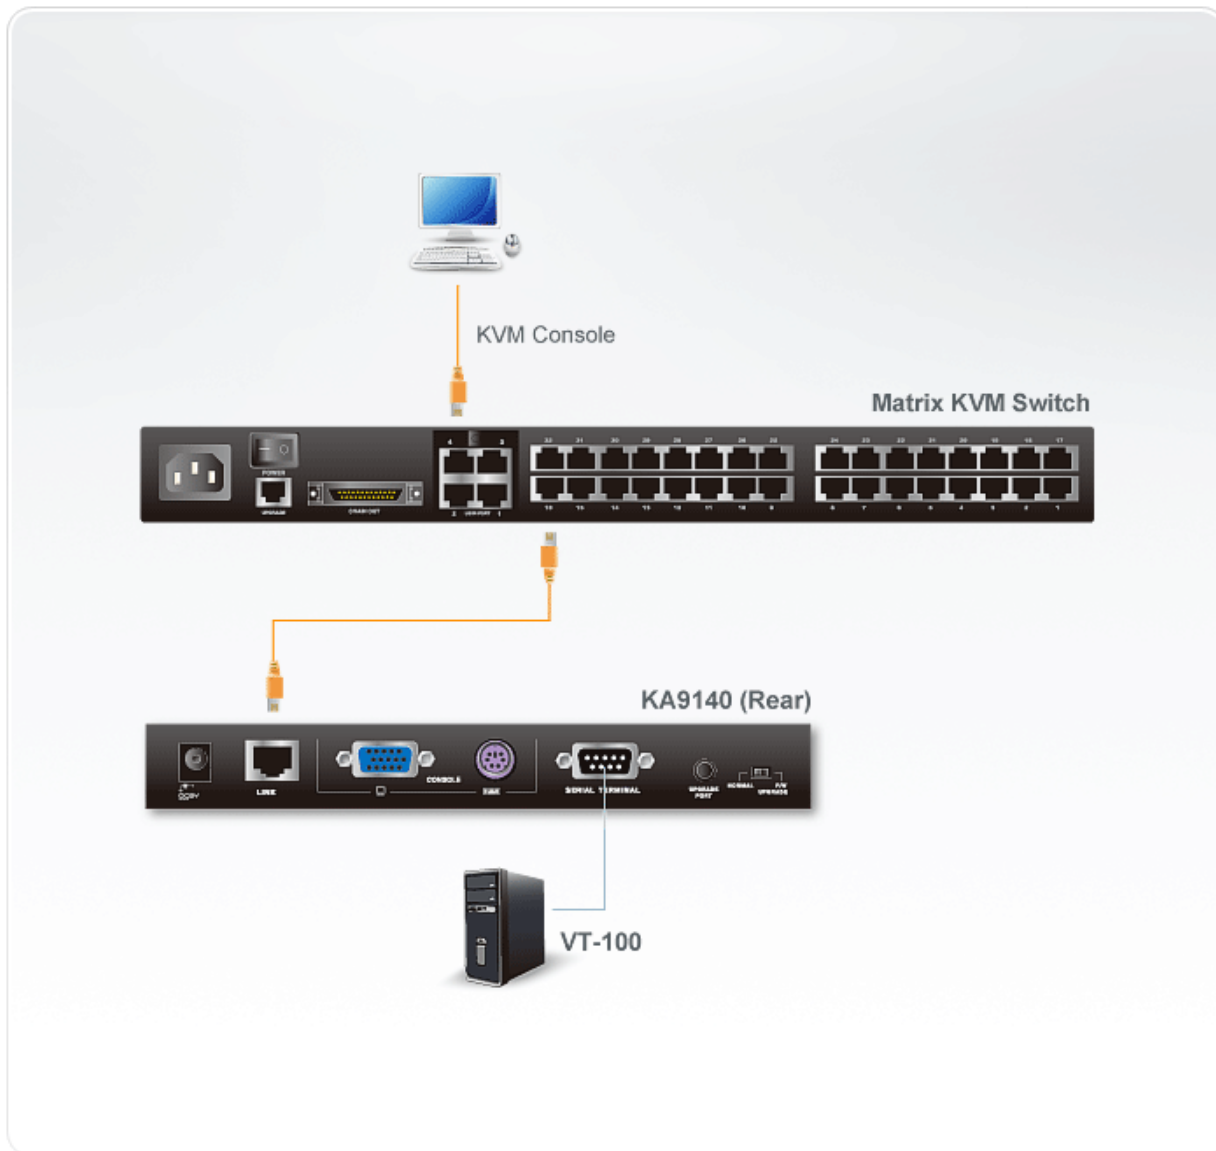

### **ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
www.aten.com E-mail: marketing@aten.com



© Copyright 2014 ATEN® International Co., Ltd.  
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
All rights reserved. All other trademarks are the property of their  
respective owners.