


## Basic PDU

### PE0212 Series

- The PE0212 series Basic PDU contains 12 AC outlets and is available in IEC or NEMA socket configurations. The PE0212 series Basic PDU features a space-saving 1U design that allows it to be mounted vertically on the outside of a rack, resulting in a more efficient use of space in the server room, while providing 12 AC outlets.

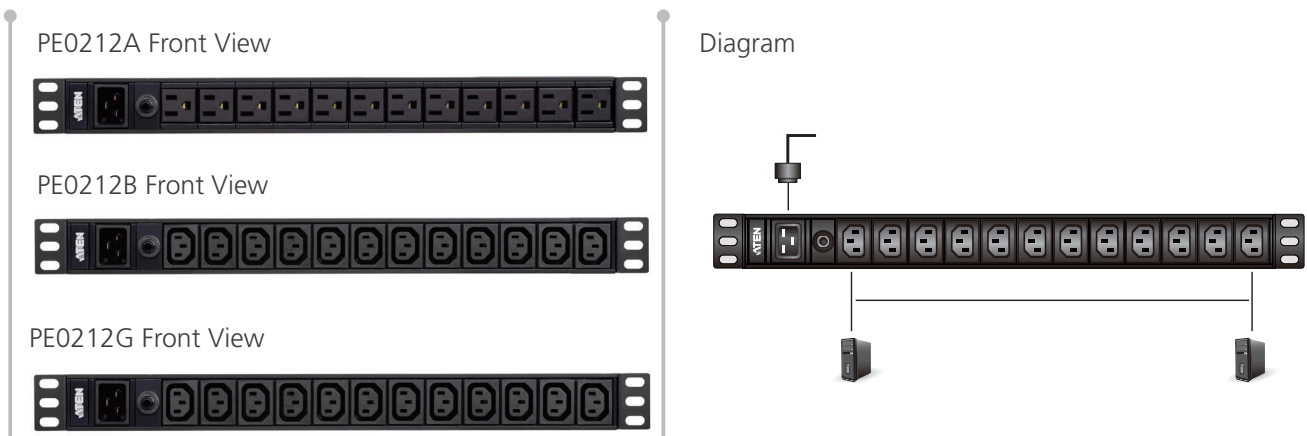

## Features

### Basic PDU

- Space saving — 1U rack mount design
- IEC or NEMA outlet models
- Overcurrent Protection
- Aluminum material

### Typical Applications

- Servers
- Network Devices
- Telecom Equipment

## Specifications

Function	PE0212A	PE0212B	PE0212G
<b>Electrical</b>			
Nominal Input Voltage	100-120 VAC	100-240 VAC	100-240 VAC
Maximum Input Current	20A Max (UL de-rated 16A Max)	20A Max (UL de-rated 16A Max)	16A Max
Input Frequency	50-60 Hz	50-60 Hz	50-60 Hz
Input Connection	IEC-320 C20	IEC-320 C20	IEC-320 C20
Input Power	IEC-320 C19 / NEMA L5-20P or NEMA 5-20P	IEC-320 C19 / NEMA L6-20P	IEC-320 C19 / IEC-320 C20
Outlet Type	(12) NEMA 5-20R	(12) IEC 320 C13	(12) IEC 320 C13
Maximum Output Current (Outlet)	20A Max (UL de-rated 16A Max)	15A Max (UL de-rated 12A Max)	10A max
Maximum Output Current (Bank)	20A Max (UL de-rated 16A Max)	20A Max (UL de-rated 16A Max)	16A max
Maximum Output Current (Total)	20A Max (UL de-rated 16A Max)	20A Max (UL de-rated 16A Max)	16A max
OPD (Overcurrent Protection Device)	Yes	Yes	Yes
<b>Physical Properties</b>			
Dimensions (L x W x H)	48.80 x 4.40 x 4.50 cm	48.80 x 4.40 x 4.50 cm	48.80 x 4.40 x 4.50 cm
Weight	0.88 kg	0.88 kg	0.88 kg
Power Cord Length	10ft (12#)	10ft (12#)	10ft (3x1.5mm <sup>2</sup> )
<b>Environmental</b>			
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C	0 – 40°C / -20 – 60°C	0 – 40°C / -20 – 60 °C
Elevation	3000m	3000m	3000m
<b>Compliance</b>			
EMC Verification	FCC Class A	FCC Class A	CE Class A
Safety Verification	-	-	CE, LVD

Product information is subject to change without prior notice.

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Publish Date: 10/2018 V1.0



© Copyright 2018 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.