

ATEN PP4.0 Secure KVM Remote Port Selector

2XRT-0019G

The ATEN PP4.0 Secure KVM Remote Port Selector (RPS), 2XRT-0019G, is designed to enhance user experience and efficiency while operating ATEN PP4.0 Secure KVM Switches by providing an efficient way to switch between connected computers. Simply plug and play¹ the RPS to the Secure KVM Switch² without any additional software installation required to quickly and easily control your ATEN PP4.0 Secure KVM Switch. Once the RPS is connected, simply press the RPS pushbuttons to switch KVM focus. The status will show on both the KVM front panel LEDs and the RPS front panel LEDs. The RPS' Tamper-Evident Label and Always-on Chassis Intrusion Detection prevent any attempt at physical tampering, helping to safeguard classified data against malicious attacks. Thanks to its compact size, the device can be placed line-of-sight on the desktop, enabling instant switching across multiple PCs and optimizing productivity while eliminating cable clutter.

Note:

- Make sure to connect the RPS before powering on the ATEN Secure KVM Switch. If the RPS is connected after the ATEN Secure KVM Switch is powered on, the RPS will not be detected.
- 2. The RPS is compatible with ATEN PP4.0 2/4/8-Port Secure KVM Switches.










Features

- Plug-and-Play no additional software installation is required
- Auto Detection works exclusively with ATEN PP4.0 2/4/8-Port Secure KVM Switches
- Always-on Chassis Intrusion Detection and Tamper-Evident Lahel
- Clear LED indications reflect real-time KVM status
- Compact size with 1.8 m cable for easy deployment

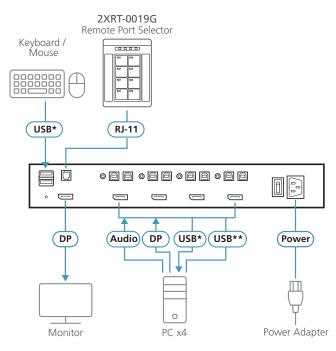

*USB Keyboard / Mouse **USB CAC

Specifications

	2XRT-0019G
Connectors	
Link	RJ-11
LEDs	
Online / Selected (KVM Port)	8 (Orange)
Online / Selected (CAC Port)	1 (Green)
Key Lock	3 (Green)
Cable Length	1.8 m
Maximum Input Power Rating	5V ; 0.17 A
Power Consumption	DC 5 V : 0.15 W
Environmental	
Operating Temperature	0 – 50 °C
Storage Temperature	-20 – 60 °C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.14 kg
Dimensions (L x W x H)	7.70 x 11.19 x 3.6 cm

Product information is subject to change without prior notice.

© Copyright 2022 ATEN® International Co. Ltd. ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd. All rights reserved. All other trademarks are the property of their respective owners.

