


Bild / Picture



4S Seriell RS-232 PCI Karte, inkl. Octopus Kabel
POS einstellbar (FTDI Chip-Set)

Anwendung / Application

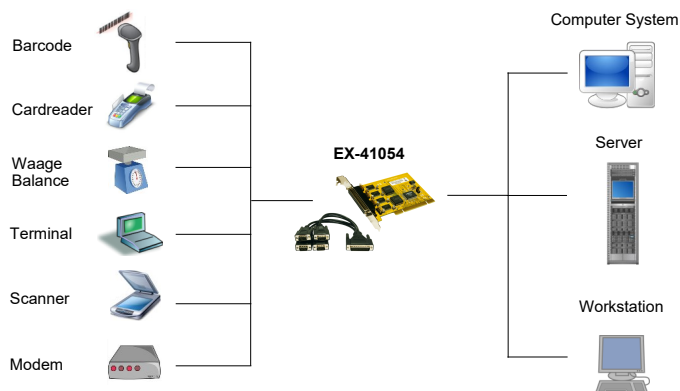

4S Serial RS-232 PCI card incl. Octopus cable
POS configurable (FTDI Chip-Set)

Beschreibung

Die EX-41054 PCI I/O Karte stellt vier serielle RS-232 High Performance UART 16C550 Ausgänge zur Verfügung. Sie ist entwickelt worden um vier weiteren Seriellen Ports für PC, kleine Workstation oder Server über den PCI- oder PCI-X Bus zu erweitern. Die Karte ist voll Plug-and-Play kompatibel und hat vier innenliegende 10 Pin Pfostenstecker für internen Anschluss.

Description

The EX-41054 PCI I/O adapter provides four high performance 16C550-type UART RS-232 serial ports. It is designed for PC, thin client or server to provide instant COM port expansion via the PCI- or PCI-X Bus. The card is fully Plug-and-Play compatible and has four internal 10 pin pole plug for connect internal device.

Merkmale

Features

<ul style="list-style-type: none"> Schnittstelle: RS232 V.24 	<ul style="list-style-type: none"> Interface: RS232 V.24
<ul style="list-style-type: none"> FIFO Buffer: 16C550 mit 256Byte 	<ul style="list-style-type: none"> FIFO Buffer: 16C550 with 256Byte
<ul style="list-style-type: none"> ±15kV IEC1000-4-2 ESD Schutz für RS232 I/O's 	<ul style="list-style-type: none"> ±15KV IEC1000-4-2 ESD Protection for RS232 I/O's
<ul style="list-style-type: none"> I/O Adressen und Interrupt wird vom System BIOS vergeben 	<ul style="list-style-type: none"> I/O addresses and Interrupt will set from the system BIOS, IRQ sharing
<ul style="list-style-type: none"> Daten Bits: 5, 6, 7, 8 	<ul style="list-style-type: none"> Data Bits: 5, 6, 7, 8
<ul style="list-style-type: none"> Stop Bits: 1, 1.5, 2 	<ul style="list-style-type: none"> Stop Bits: 1, 1.5, 2
<ul style="list-style-type: none"> Parity: none, even, odd, space, mark 	<ul style="list-style-type: none"> Parity: none, even, odd, space, mark
<ul style="list-style-type: none"> Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND 	<ul style="list-style-type: none"> Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
<ul style="list-style-type: none"> Unterstützt Motherboard mit 5V und 3.3V 	<ul style="list-style-type: none"> Support Motherboard with 5V and 3.3V

System / OS

Geprüft / Approved

Verpackung / Packaging



Spezifikation

Specification

Chip-Set:	MosChip MCS9845CV	Chip-Set:	MosChip MCS9845CV
Datentransfer-Rate:	300Baud bis 115.2KBaud	Data transfer rate:	300Baud up to 115.2KBaud
Anschlüsse:	1 x 37 Pin Buchse 4 x 9 Pin Seriell RS-232 Stecker (Octopus Kabel)	Connectors:	1 x 37 pin female 4 x 9 pin serial RS-232 male (Octopus cable)
Hardwaresysteme:	PCI 32-Bit oder PCI-X 64-Bit Slot	Hardware system:	PCI 32-bit or PCI-X 64-Bit slot
Treiber:	DOS, Win9.x/ME/2000/XP/Vista/7/8.x/10 (32&64) Server 200x & 2012 R2, Linux	Driver:	DOS, Win9.x/ME/2000/XP/Vista/7/8.x/10 (32&64) Server 200x & 2012 R2, Linux
Betriebssysteme:	Gemäß Treiber	Operating systems:	In accordance with driver
Betriebstemperatur :	0°C bis +55°C Celsius	Operating temperature :	32°F up to 131°F Fahrenheit
Lagertemperatur:	-40°C bis +75°C Celsius	Storage temperature:	-40°F up to 167°F Fahrenheit
Rel. Luftfeuchtigkeit:	5% bis 95%	Rel. Humidity:	5% to 95%
Stromversorgung:	+5Volt über den PCI-Slot	Current Supply:	+5V over the PCI-slot
Abmessung:	120.95 x 76.00 mm	Size:	120.95 x 76.00 mm
Gewicht:	450 g	Weight:	450 g
EAN:	4718359410543	EAN:	4718359410543
Ursprungsland:	Taiwan	Country of origin:	Taiwan
Lieferumfang:	EX-41054, Octopus Kabel, 8 x Muttern, Treiber CD, Handbuch	Packaging contents:	EX-41054, Octopus cable, 8 x nuts, Driver CD, Manual