


CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A0	INITIAL RELEASE		

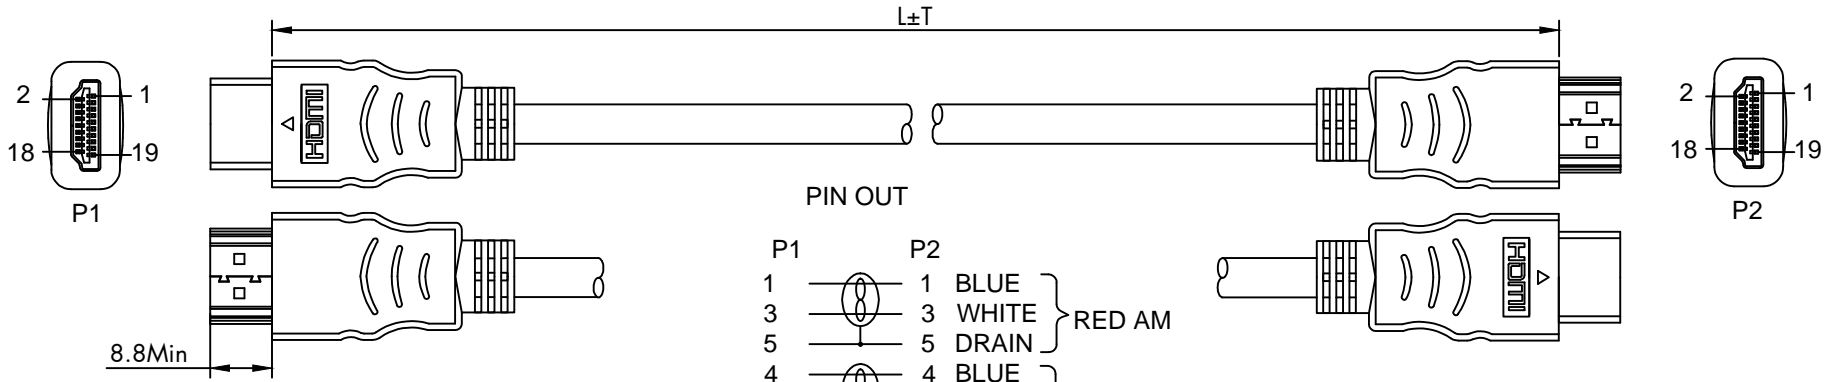

PIN OUT

P1	P2		
1	1	BLUE	} RED AM
3	3	WHITE	
5	5	DRAIN	} SILVER AM
4	4	BLUE	
6	6	WHITE	} BLUE AM
2	2	DRAIN	
7	7	BLUE	} BROWN AM
9	9	WHITE	
11	11	DRAIN	} GREEN AM
10	10	BLUE	
12	12	WHITE	} GREEN AM
8	8	DRAIN	
13	13	GREEN	
14	14	BLUE	
19	19	WHITE	
17	17	DRAIN	
15	15	WHITE	
16	16	BLUE	
18	18	RED	
SHELL	DRAIN	SHELL	

NOTE:
 1. ELECTRONIC TEST
 1.1 OPEN/SHORT 100% TEST
 1.2 CONDUCTOR RESISTANCE: 5 OHMS MAX.
 1.3 INSULATION RESISTANCE: 10 MEGOHMS MIN.
 2. HDTV-DVD TEST
 3. PRINTING: HIGH SPEED HDMI® CABLE WITH ETHERNET
 RoHS2.0(2011/65/EU) AND (2015/863/EU) WITH REACH COMPLIANT

ITEM NO.	LENGTH	DSP
21.15.3200	1000±30	4K2K @60HZ
21.15.3201	1800±50	4K2K @60HZ
21.15.3202	3000±70	4K2K @30HZ
21.15.3203	5000±70	4K2K @30HZ

NO.	PART NAME	DESCRIPTION	QUANTITY	REMARKS
③	OUTER MOLD	PVC/BLACK	2	
②	HDMI AM	HDMI 19PIN AM, GOLD PLATED PIN AND SHELL	2	
①	CABLE	(30AWG BC*1P+30AWG+AM)*5+30AWG BC*4C+ADB16/8/0.12 AL-MG JACKET: PVC/ BLACK, OD: 6.0±0.2MM	2	

NAME	VALUE HDMI 1.4 CABLE, BLACK, GOLD PLATED		
ITEM NO.			
SECOMP	MAPE	TOLERANCE	
		X. ±1.00 X.X ±0.50	
	DRAW BY	SCALE	MM
		PAGE	1/1