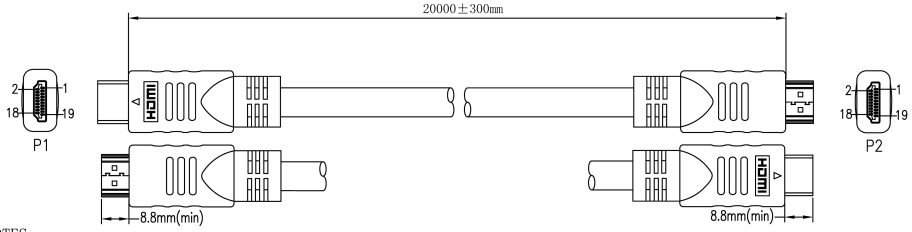

NOTES:

1. MATERIAL
   1.1 HDMI CABLE:(24AWG BC*1P+28AWG BC+AM)*4PCS+(28AWG BC*1P+28AWG BC+AM)+28AWG BC *4C+AM+28AWG BC+128/0.12ALM+BLACK PVC JACKET.
   OD: ⌀ 9.8 ± 0.2 mm
   CABLE MARKING:HIGH SPEED HDMI® CABLE WITH ETHERNET
   1.2 HDMI 19PIN TYPE A MALE:BLACK INSULATION, GOLD PLATED CONTACTS,GOLD PLATED SHELL .
   1.3 ALL HOOD:MOLDED BLACK PVC.
2. ELECTRICAL
   2.1 100% OPEN AND SHORT TEST.
   2.2 CONDUCTOR RESISTANCE: 10 OHMS MAX.
   2.3 INSULATION RESISTANCE: 5 MEGOHMS MIN.
   2.4 HDTV-DVD TEST :1080I
3. PACKAGING: 1 PC/POLYBAG+CUSTOMIZED LABEL
4. ALL MATERIALS ARE ROHS AND REACH COMPLIANT.

PIN OUT



LENGTH TOLERANCE: X. ± 0.5 .X ± 0.2 .XX ± 0.1	SCALE: FREE		SECOMP		ENG: Ann
ANGLE TOLERANCE: X° ±3° .X° ±1°	UNIT: mm		PRODUCT NO: P/N	CUSTOMER NO: 21.15.3206	CHECKED: Wiliam
	VERSION: 00	PAGE: 1/1	DRAWING NO:	PRODUCT DESCRIPTION: HDMI AM/AM/NICKEL-PLATED,BLACK	APPROVED: