


$$L=X+100/0\text{mm}$$

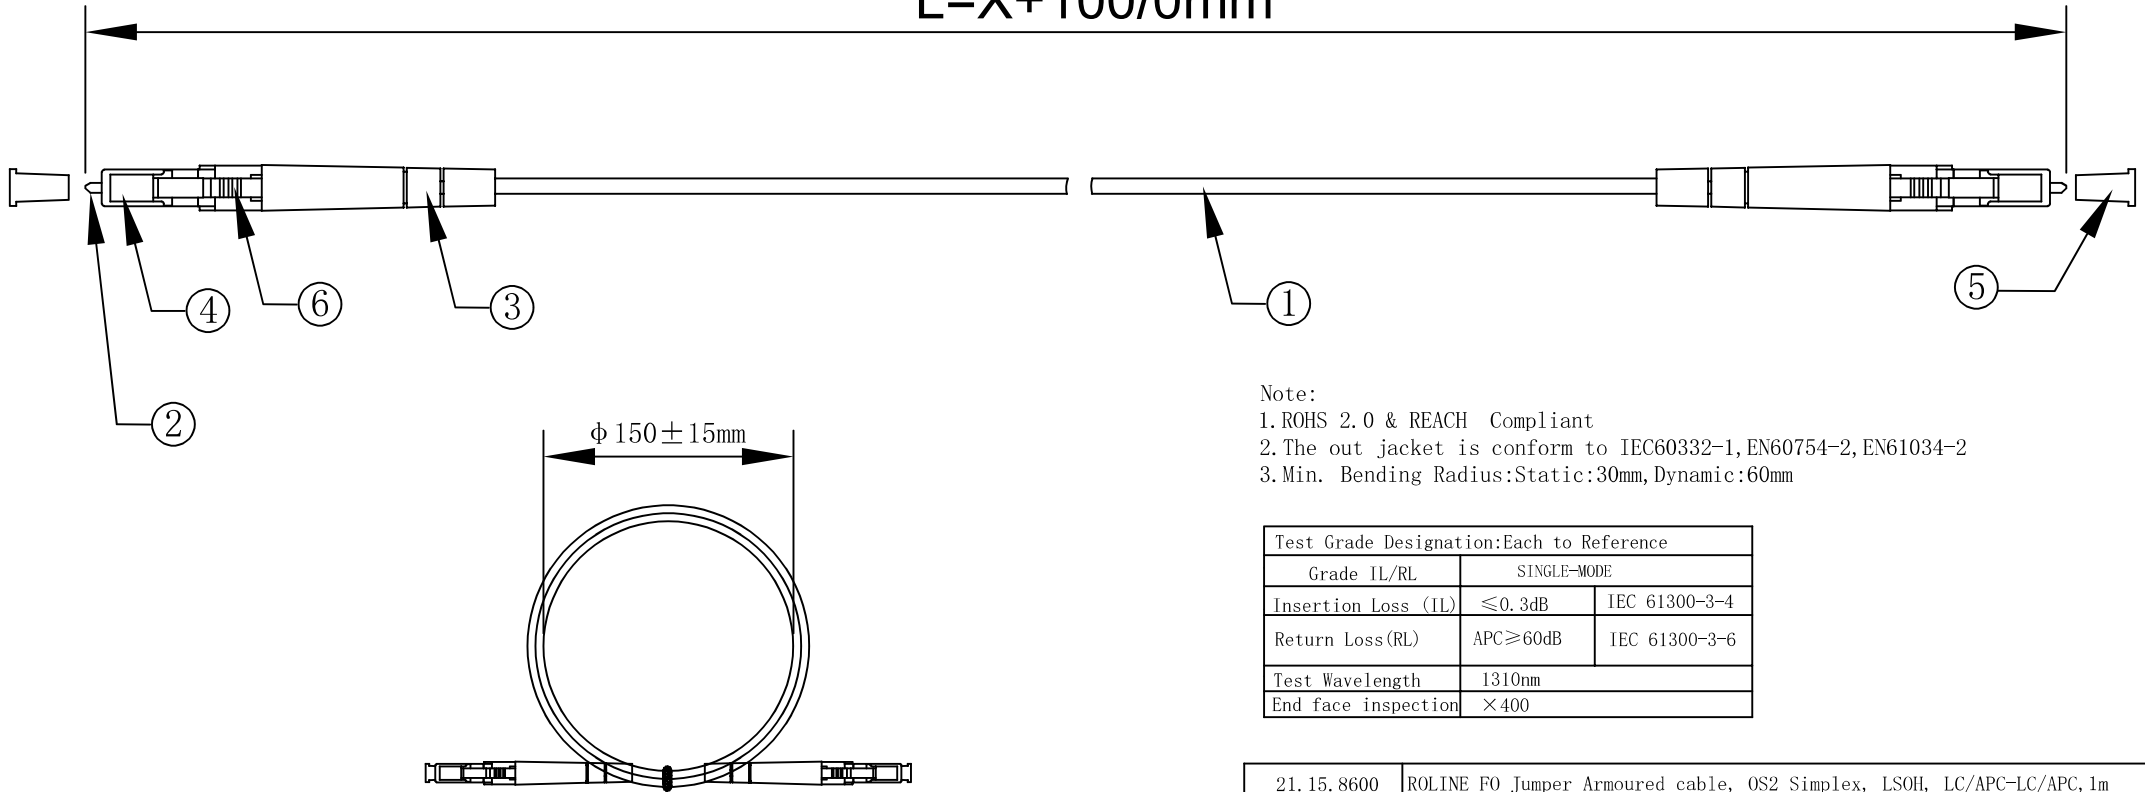

Note:

1. ROHS 2.0 & REACH Compliant
2. The out jacket is conform to IEC60332-1, EN60754-2, EN61034-2
3. Min. Bending Radius: Static: 30mm, Dynamic: 60mm

Test Grade Designation: Each to Reference		
Grade IL/RL	SINGLE-MODE	
Insertion Loss (IL)	≤ 0.3dB	IEC 61300-3-4
Return Loss (RL)	APC ≥ 60dB	IEC 61300-3-6
Test Wavelength	1310nm	
End face inspection	× 400	

MATERIAL LIST:

⑥	LC Simplex Clip Green	2pcs	
⑤	LC Dust Cap White	2pcs	
④	LC Simplex Connector Green	2pcs	
③	LC 3.0 Boot White	2pcs	
②	LC/APC SM Ferrule	2pcs	
①	Fiber Optical Cable Simplex OS2 9/125 (G657.A2) ϕ 3.0mm LSZH White Armored (only Stainless steel spiral pipe, no Stainless Steel braiding)	L+0.1m	

21.15.8600	ROLINE F0 Jumper Armoured cable, OS2 Simplex, LSOH, LC/APC-LC/APC, 1m
21.15.8601	ROLINE F0 Jumper Armoured cable, OS2 Simplex, LSOH, LC/APC-LC/APC, 2m
21.15.8602	ROLINE F0 Jumper Armoured cable, OS2 Simplex, LSOH, LC/APC-LC/APC, 3m
21.15.8603	ROLINE F0 Jumper Armoured cable, OS2 Simplex, LSOH, LC/APC-LC/APC, 5m
21.15.8604	ROLINE F0 Jumper Armoured cable, OS2 Simplex, LSOH, LC/APC-LC/APC, 7m
21.15.8605	ROLINE F0 Jumper Armoured cable, OS2 Simplex, LSOH, LC/APC-LC/APC, 10m
21.15.8606	ROLINE F0 Jumper Armoured cable, OS2 Simplex, LSOH, LC/APC-LC/APC, 15m
21.15.8607	ROLINE F0 Jumper Armoured cable, OS2 Simplex, LSOH, LC/APC-LC/APC, 20m

NO.	SPECIFICATION STANDARD	QT' Y	REMARK
	ADD THE ITEM NO.	2024-04-17	
	NEW	2022-01-20	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE REV.

ITEM NO.	Product description
	