
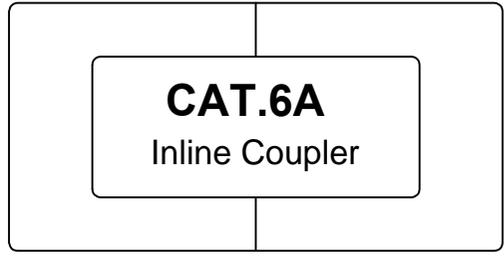
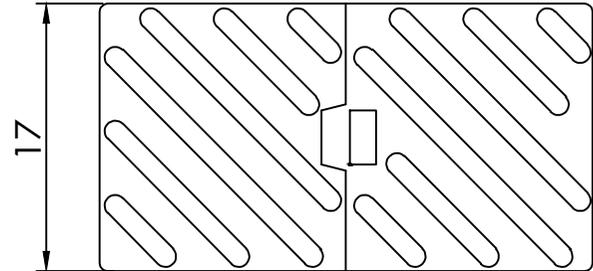

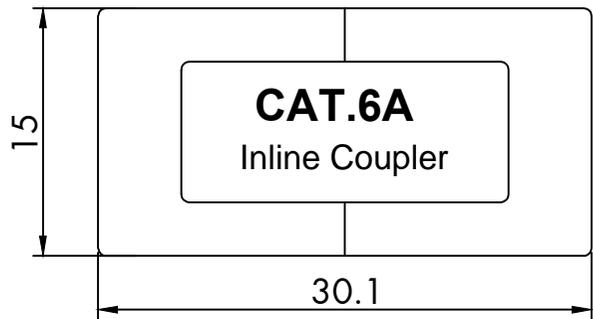


CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY

| REVISIONS | | | |
|-----------|-----------------|------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A0 | INITIAL RELEASE | | |
| | | | |
| | | | |



NOTE:
1. Open/short 100% test

RoHS2.0(2011/65/EU) AND (2015/863/EU) WITH REACH COMPLIANT

| ④ | JACK | UNSHIELDED RJ45 8P8C, GOLD PLATED PIN | 2 | |
|-----|-----------|---------------------------------------|----------|---------|
| ③ | INSERT | ABS/WHITE | 2 | |
| ② | PCB | FR-4 | 1 | |
| ① | HOUSING | PC/WHITE | 1 | |
| NO. | PART NAME | DESCRIPTION | QUANTITY | REMARKS |

| | | | |
|---------------|---|-----------|-------|
| NAME | VALUE Cat.6A UTP Mini-Inline Coupler, white | | |
| ITEM NO. | 21.99.3013 | | |
| SECOMP | MAPE | TOLERANCE | |
| | | X. | ±1.00 |
| | | X.X | ±0.50 |
| | DRAW BY | SCALE | MM |
| | | PAGE | 1/1 |