

Viewsonic LS832WU vidéo-projecteur Projecteur à focale standard 5000 ANSI lumens LED WUXGA (1920x1200) Blanc

Marque : Viewsonic


Code produit: LS832WU

Nom du produit : LS832WU

Viewsonic LS832WU. Luminosité du projecteur: 5000 ANSI lumens, Technologie de projection: LED, Résolution native du projecteur: WUXGA (1920x1200). Type de source lumineuse: Laser, Durée de vie de la source lumineuse: 20000 h, Durée de vie de la source lumineuse (mode économique): 30000 h. Longueur focale: 3.7 mm, Type de zoom: Fixé, Décalage: 133%. Type d'interface série: RS-232, Version HDMI: 2.2/1.4. Niveau sonore: 34 dB, Niveau sonore (mode économique): 28 dB



Projector		Ports & interfaces	
Screen size compatibility *	2032 - 4318 mm (80 - 170")	HDMI ports quantity *	2
Projector brightness *	5000 ANSI lumens	Network	
Projection technology *	LED	Ethernet LAN *	✓
Projector native resolution *	WUXGA (1920x1200)	Ethernet LAN (RJ-45) ports	1
Contrast ratio (typical) *	3000000:1	Features	
Number of colours	1.07 billion colours	Noise level (economic mode)	28 dB
Keystone correction, horizontal	10°	Noise level *	34 dB
Keystone correction, vertical	10°	Multimedia	
Horizontal synchronization (min)	15 kHz	Built-in speaker(s) *	✓
Horizontal synchronization (max)	91 kHz	RMS rated power	10 W
Light source		Number of built-in speakers	1
Light source type *	Laser	Design	
Service life of light source *	20000 h	Market positioning *	Portable
Service life of light source (economic mode)	30000 h	Product type *	Standard throw projector
Lens system		Product colour *	White
Focal length range	3.7 mm	Display	
Zoom capability	✓	Built-in display *	✗
Zoom type	Fixed	Power	
Throw ratio	0.253	Power source *	AC
Offset	133%	Power consumption (typical) *	328 W
Ports & interfaces		Power consumption (standby) *	0.5 W
HDMI version	2.2/1.4	AC input voltage	100-240 V
USB 2.0 ports quantity	1	AC input frequency	50-60 Hz
USB 2.0 Type-A ports quantity	1	Operational conditions	
USB 2.0 Type-B ports quantity	1	Operating temperature (T-T)	5 - 40 °C
Audio (L/R) in *	1	Weight & dimensions	
Microphone in	✓	Width	382 mm
Serial interface type *	RS-232	Depth	318 mm
VGA (D-Sub) ports quantity *	1	Height	132 mm
		Weight *	5.8 kg
		Package width	518 mm
		Package depth	420 mm
		Package height	313 mm
		Package weight	8.1 kg
		Packaging content	
		Remote control included *	✓

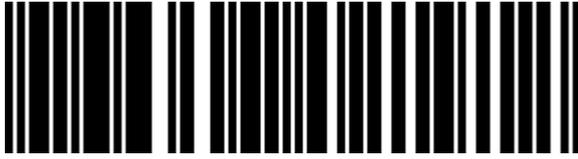

0766907021912



766907021912

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.