




**APC Easy UPS On-Line SRV alimentation d'énergie non interruptible Double-conversion (en ligne) 3 kVA 2700 W 7 sortie(s) CA**

Marque : APC

Code produit: SRV1KI-E


Nom du produit : Easy UPS On-Line SRV



APC Easy UPS On-Line SRV. Topologie UPS: Double-conversion (en ligne), capacité de la puissance de sortie: 3 kVA, Puissance de sortie: 2700 W. Types de sortie AC: Coupleur C13, Coupleur C19, Prise mâle: Coupleur C20, Nombre de prises en sortie: 7 sortie(s) CA. Technologie batterie: Sealed Lead Acid (VRLA), Tension des piles: 72 V, Durée de vie totale de la batterie (max): 3 année(s). Format: Mini Tower, Couleur du produit: Noir, Longueur de câble: 1,5 m. Certification: CE UKCA TISI

Features		Battery	
UPS topology *	Double-conversion (Online)	Battery technology	Sealed Lead Acid (VRLA)
Output power capacity *	3 kVA	Battery voltage	72 V
Output power *	2700 W	Battery life (max)	3 year(s)
Waveform *	Sine	Battery recharge time	4 h
Input operation voltage (min) *	110 V	Design	
Input operation voltage (max) *	285 V	Form factor *	Mini Tower
Input frequency *	40 - 70 Hz	Cable length	1.5 m
Output operation voltage (min)	220 V	Product colour *	Black
Output operation voltage (max)	240 V	Display type	LCD
Output frequency	50/60 Hz	International Protection (IP) code	IP20
Output voltage regulation	3%	Operational conditions	
Efficiency	88%	Operating temperature (T-T)	0 - 40 °C
Crest factor	3:1	Storage temperature (T-T)	-20 - 50 °C
Output voltage Total Harmonic Distortion (THD)	3%	Operating relative humidity (H-H)	0 - 95%
Noise level	50 dB	Storage relative humidity (H-H)	0 - 95%
Surge protection	✓	Operating altitude	0 - 3000 m
Audible alarm(s)	✓	Non-operating altitude	0 - 15000 m
Audible alarm modes	Low battery alarm, Overload alarm	Certificates	
Power source type	AC	Certification	CE UKCA TISI
Detachable power cord	✓	Packaging content	
Ports & interfaces		Rack mount kit	✗
AC outlet types	C13 coupler, C19 coupler	Cables included	Input power cable, Output power cable, RS-232, USB cable
Power plug	C20 coupler	Manual	✓
AC outlets quantity	7 AC outlet(s)	Weight & dimensions	
USB port	✓	Width	190 mm
USB 2.0 ports quantity	1	Depth	425 mm
USB port type	USB Type-B		

Ports & interfaces		Weight & dimensions	
Serial interface	✓	Height	336 mm
RS-232 ports	1	Weight	26 kg
		Packaging data	
		Package width	565 mm
		Package depth	325 mm
		Package height	465 mm
		Package weight	28 kg

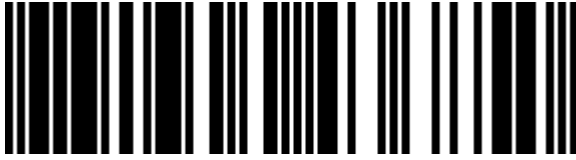

0731304436850



731304436850

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 02-MAY-2025. Prints or copies of Information are only valid on the printed Publication date