



APC EPDU2216SMBO unité de distribution d'énergie 24 sortie(s)  
CA 0U Noir

Marque : APC


Code produit: EPDU2216SMBO

Nom du produit : EPDU2216SMBO

APC EPDU2216SMBO. Types de PDU: Avec mesure en ligne, Commutable, Capacité du rack: 0U, Type: Triphasé. Nombre de prises en sortie: 24 sortie(s) CA, Types de sortie AC: Coupleur C13, Coupleur C19, Prise mâle: IEC 60309. Longueur de câble: 3 m. Tension nominale à l'entrée: 400 V, Intensité (max.): 16 A, Fréquence d'entrée AC: 50/60 Hz. Largeur: 55 mm, Profondeur: 56 mm, Hauteur: 1800 mm



| Design                              |                                  | Puissance                                 |             |
|-------------------------------------|----------------------------------|-------------------------------------------|-------------|
| Types de PDU *                      | Avec mesure en ligne, Commutable | Capacité d'alimentation/charge            | 11000 VA    |
| Type                                | Triphasé                         | Puissance max.                            | 11000 W     |
| Capacité du rack *                  | 0U                               | Poids et dimensions                       |             |
| Montage                             | verticale                        | Largeur                                   | 55 mm       |
| Matériau du boîtier/corps           | Métal                            | Profondeur                                | 56 mm       |
| Couleur du produit                  | Noir                             | Hauteur                                   | 1800 mm     |
| Écran                               | LCD                              | Poids                                     | 7,12 kg     |
| Connectivité                        |                                  | Informations sur l'emballage              |             |
| Nombre de prises en sortie *        | 24 sortie(s) CA                  | Poids du paquet                           | 8,29 kg     |
| Prise mâle                          | IEC 60309                        | Largeur du colis                          | 195 mm      |
| Types de sortie AC *                | Coupleur C13, Coupleur C19       | Profondeur du colis                       | 130 mm      |
| Nombre de port ethernet LAN (RJ-45) | 1                                | Hauteur du colis                          | 2030 mm     |
| Nombre de ports USB                 | 1                                | Conditions environnementales              |             |
| Caractéristiques                    |                                  | Température d'opération                   | -5 - 50 °C  |
| Longueur de câble                   | 3 m                              | Température hors fonctionnement           | -25 - 65 °C |
| Puissance                           |                                  | Humidité relative de fonctionnement (H-H) | 5 - 95%     |
| Tension nominale à l'entrée *       | 400 V                            | Taux d'humidité relative (stockage)       | 5 - 95%     |
| Fréquence d'entrée AC               | 50/60 Hz                         |                                           |             |
| Intensité (max.) *                  | 16 A                             |                                           |             |
| Tension de sortie                   | 200-240 V                        |                                           |             |

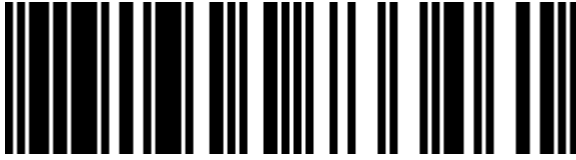

0731304733461



731304733461

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 23-AUG-2024. Prints or copies of Information are only valid on the printed Publication date