



APC Easy Rack PDU, Metered Outlet, 0U, 3 Phase, 22kW, 230V, 32A, (18) C13 and (6) C19 outlets, IEC60309 3P+N+PE inlet



Marque : APC


Code produit: EPDU2232MBO

Nom du produit : Easy Rack PDU, Metered Outlet, 0U, 3 Phase, 22kW, 230V, 32A, (18) C13 and (6) C19 outlets, IEC60309 3P+N+PE inlet

Easy Rack PDU, Metered Outlet, 0U, 3 Phase, 22kW, 230V, 32A, (18) C13 and (6) C19 outlets, IEC60309 3P+N+PE inlet

APC Easy Rack PDU, Metered Outlet, 0U, 3 Phase, 22kW, 230V, 32A, (18) C13 and (6) C19 outlets, IEC60309 3P+N+PE inlet. Types de PDU: Avec mesure en ligne, Capacité du rack: 0U, Type: Triphasé. Nombre de prises en sortie: 32 sortie(s) CA, Types de sortie AC: Coupleur C13, Coupleur C19, Prise mâle: Coupleur C13. Longueur de câble: 3 m. Surveillance: Courant, Énergie, Tension. Tension nominale à l'entrée: 400 V, Intensité (max.): 32 A, Fréquence d'entrée AC: 50/60 Hz

Design		Power	
PDU types *	Metered	Load capacity	22000 VA
Type	Three-phase	Number of phases	3
Rack capacity *	0U	Maximum power	22000 W
Mounting	Vertical	Certificates	
Housing material	Aluminium	Compliance certificates	CE, RCM, REACH, RoHS, cTUVus, UKCA
Product colour	Black	Certification	CE, TUV, EN 62368-1, RCM, UKCA
Display	LCD	Operational conditions	
On/off switch	✗	Operating temperature (T-T)	-5 - 50 °C
Ports & interfaces		Storage temperature (T-T)	-25 - 65 °C
AC outlets quantity *	32 AC outlet(s)	Operating relative humidity (H-H)	5 - 95%
Power plug	C13 coupler	Storage relative humidity (H-H)	5 - 95%
AC outlet types *	C13 coupler, C19 coupler	Operating altitude	0 - 3000 m
Features		Non-operating altitude	0 - 15000 m
Daisy chain	✗	Weight & dimensions	
Reset button	✓	Width	55 mm
LED indicators	✓	Depth	56 mm
Cable length	3 m	Height	1800 mm
Management features		Weight	8.38 kg
Monitoring	Current, Power, Voltage	Packaging data	
Power		Package weight	9.55 kg
Nominal input voltage *	400 V	Package width	195 mm
AC input frequency	50/60 Hz	Package depth	130 mm
Maximum current *	32 A	Package height	2030 mm
Nominal output voltage	230 V		
Output voltage	230 V		

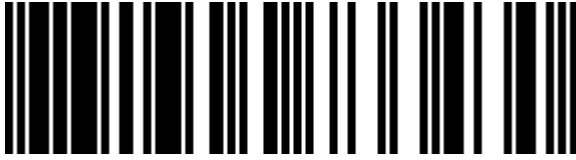

0731304733430



731304733430

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.