



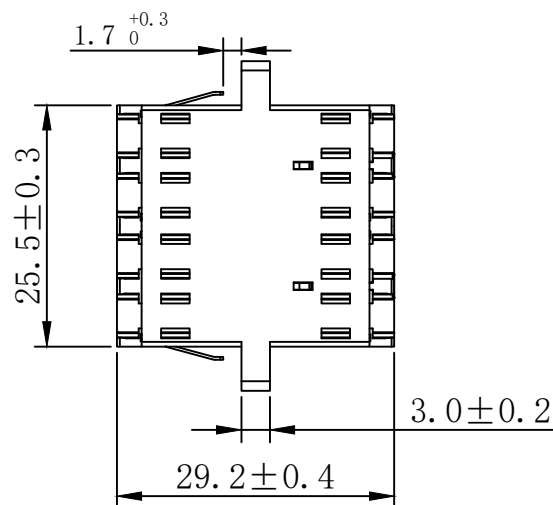

NOTE:
RoHS 2.0 & REACH COMPLIANT

Insertion Loss (typical) (dB)	≤0.12
Insertion Loss (dB)	≤0.20
Operating Temperature (°C)	-40 ~ +80
Storage Temperature (°C)	-40 ~ +85

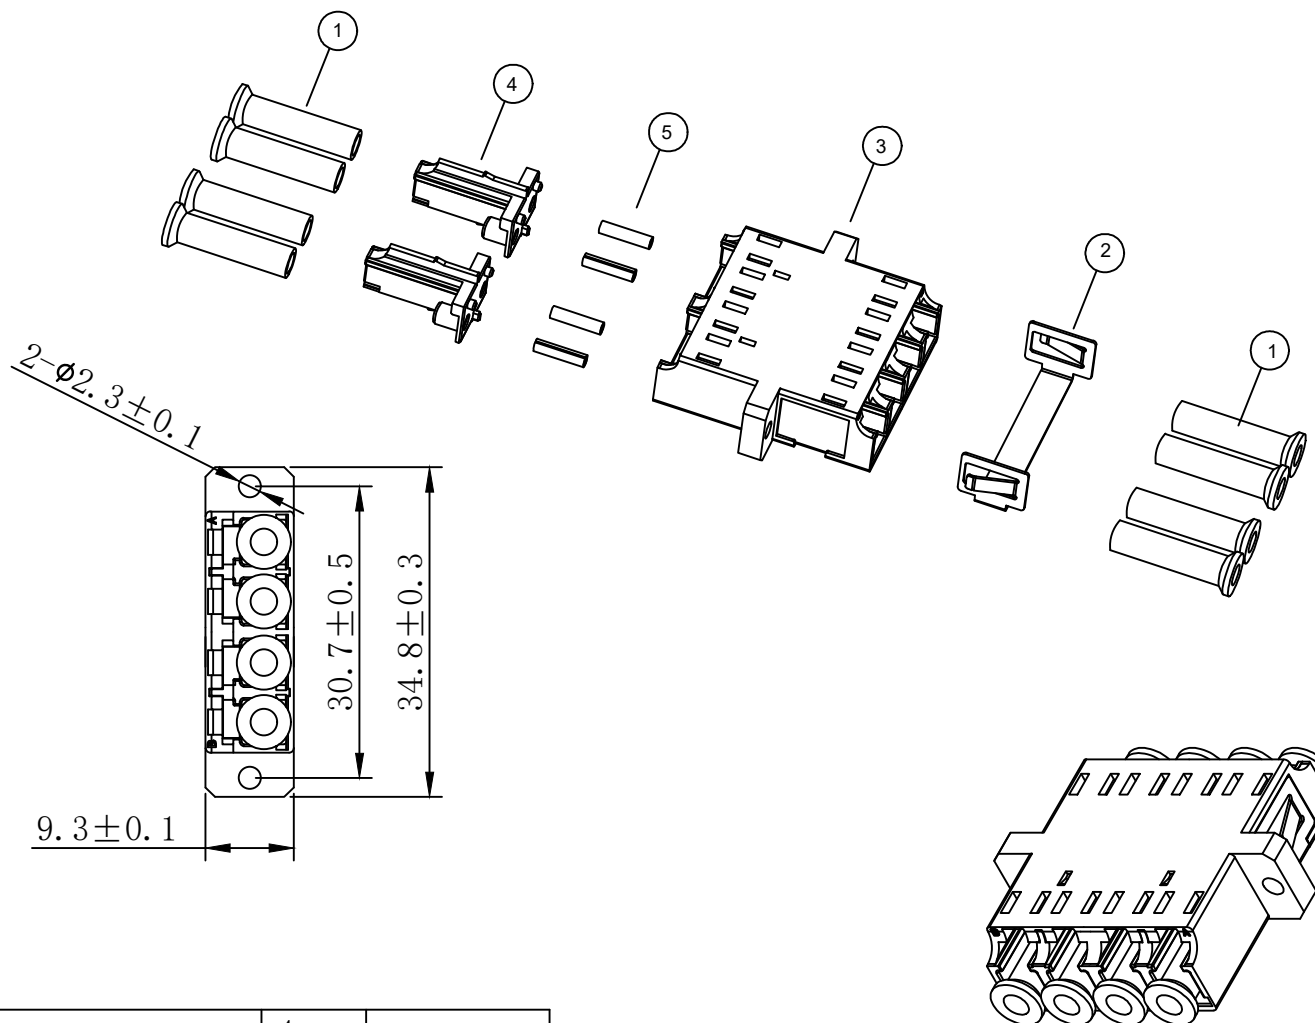

⑤	LC Sleeve ceramic	4pcs	
④	LC Lime Green bush	2pcs	
③	LC Lime Green Body Quad (SC Duplex footprint)	1PC	
②	LC Metal Mount (SC Duplex footprint)	1PC	
①	LC White Dust Cap	8pcs	
NO.	SPECIFICATION STANDARD	QT' Y	REMARK
	Convert to one piece	2022-3-17	A1
	NEW	2018-2-9	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE REV.

ITEM NO.	DESC.
21.17.0050A	ROLINE Adaptor LC quad with flange OM5

SECOMP