


CONFIGURATION DETAILS OF  
UNDIMENSIONED FEATURES  
MAY VARY

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A0	INITIAL RELEASE		

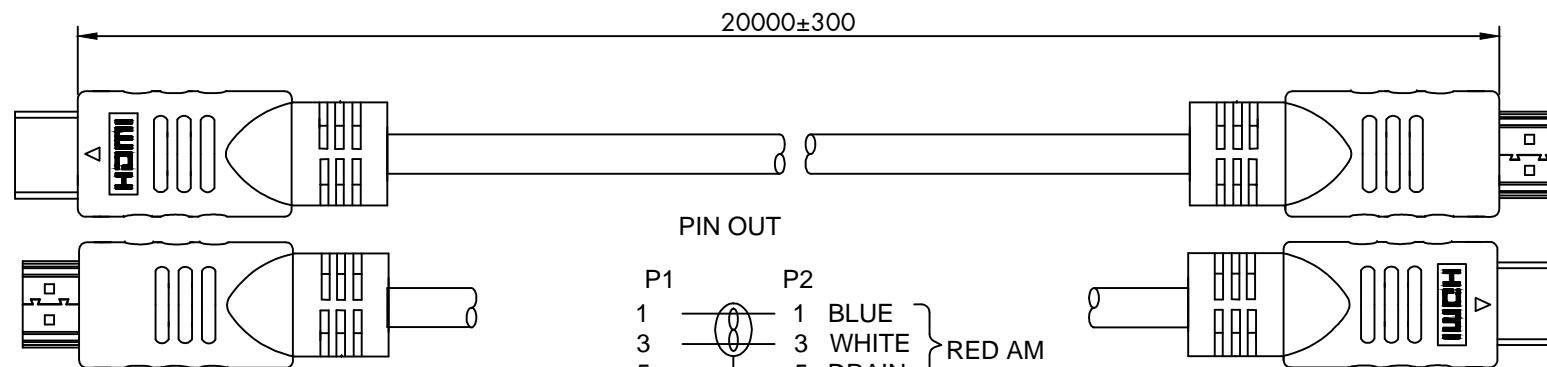

PIN OUT

P1	P2		
1	1	BLUE	RED AM
3	3	WHITE	
5	5	DRAIN	
4	4	BLUE	SILVER AM
6	6	WHITE	
2	2	DRAIN	
7	7	BLUE	BLUE AM
9	9	WHITE	
11	11	DRAIN	
10	10	BLUE	BROWN AM
12	12	WHITE	
8	8	DRAIN	
13	13	GREEN	GREEN AM
14	14	BLUE	
19	19	WHITE	
17	17	DRAIN	
15	15	WHITE	
16	16	BLUE	
18	18	RED	
SHELL	DRAIN	SHELL	

NOTE:

- 1.ELECTRONIC TEST
  - 1.1 OPEN/SHORT 100% TEST
  - 1.2 CONDUCTOR RESISTANCE:5 OHMS MAX.
  - 1.3 INSULATION RESISTANCE:10 MEGOHMS MIN.
2. HDTV-DVD TEST 1920\*1080@30HZ
- 3.PRINTING:HIGH SPEED HDMI® CABLE WITH ETHERNET  
RoHS2.0(2011/65/EU) AND (2015/863/EU) WITH REACH COMPLIANT

③	OUTER MOLD	PVC/BLACK	2	
②	HDMI AM	HDMI 19PIN AM,GOLD PLATED PIN AND SHELL	2	
①	CABLE	(24AWG BC*1P+28AWG+AM)*4+(28AWG BC*1P+28AWG BC+AM)+28AWG BC*4C+ADB16/8/0.12 AL-MG JACKET:PVC/ BLACK,OD:9.8±0.2MM	2	
NO.	PART NAME	DESCRIPTION	QUANTITY	REMARKS

NAME	VALUE HDMI 1.4 CABLE, BLACK, 20M, GOLD PLATED		
ITEM NO.	21.15.3206		
<b>SECOMP</b>	MAPE	TOLERANCE	
		X.	±1.00
		X.X	±0.50
	DRAW BY	SCALE	MM
		PAGE	1/1