



APC NetShelter Rack PDU Advanced, Contrôlé, 3PH, 22,1kW 400V 32A ou 17,3kW 415V 30A, 48 Prises, CEI309

Marque : APC

Code produit: APDU10350SW


Nom du produit : APC NetShelter Rack PDU Advanced, Contrôlé, 3PH, 22,1kW 400V 32A ou 17,3kW 415V 30A, 48 Prises, CEI309

APC NetShelter Rack PDU Advanced, Contrôlé, 3PH, 22,1kW 400V 32A ou 17,3kW 415V 30A, 48 Prises, CEI309

APC NetShelter Rack PDU Advanced, Contrôlé, 3PH, 22,1kW 400V 32A ou 17,3kW 415V 30A, 48 Prises, CEI309. Types de PDU: Commutable, Capacité du rack: 0U, Type: Triphasé. Nombre de prises en sortie: 24 sortie(s) CA, Types de sortie AC: Coupleur C13, Coupleur C15, Coupleur C19, Coupleur C21, Prise mâle: IEC 60309. Tension nominale à l'entrée: 240V, Intensité (max.): 24 A, Fréquence d'entrée AC: 50 - 60 Hz. Certification: CE, CSA C22.2 No 62368-1, EN 62368-1, FCC part 15 subpart B, UKCA, UL 62368-1. Largeur: 56 mm, Profondeur: 75 mm, Hauteur: 1780 mm



Design		Certificates	
PDU types *	Switched	Certification	CE, CSA C22.2 No 62368-1, EN 62368-1, FCC part 15 subpart B, UKCA, UL 62368-1
Type	Three-phase		
Rack capacity *	0U		
Mounting	Vertical		
Product colour	Black		
Display	LCD	Operational conditions	
On/off switch	✗	Operating temperature (T-T)	-5 - 60 °C
Ports & interfaces		Storage temperature (T-T)	-25 - 65 °C
AC outlets quantity *	24 AC outlet(s)	Operating relative humidity (H-H)	5 - 95%
Power plug	IEC 60309	Storage relative humidity (H-H)	5 - 95%
AC outlet types *	C13 coupler, C15 coupler, C19 coupler, C21 coupler	Operating altitude	0 - 3048 m
Features		Non-operating altitude	0 - 15240 m
Daisy chain	✓	Weight & dimensions	
Power		Width	56 mm
Nominal input voltage *	240V	Depth	75 mm
AC input frequency	50 - 60 Hz	Height	1780 mm
Maximum current *	24 A	Weight	9.6 kg
Nominal output voltage	240 V	Packaging data	
Load capacity	17300 VA	Package weight	12.6 kg
Maximum input current per phase	30 A	Package width	262 mm
Maximum total current draw per phase	24 A	Package depth	132 mm
		Package height	1980 mm
		Logistics data	
		Total carbon footprint (kg of CO2e)	3861.19

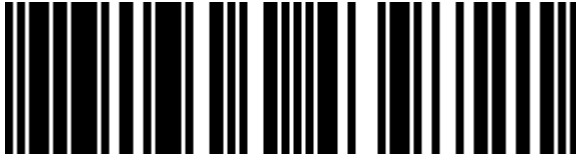

0731304439721



731304439721

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.